
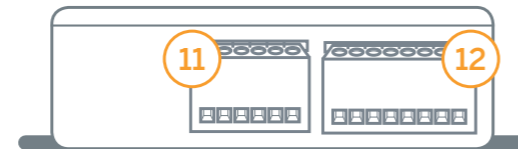
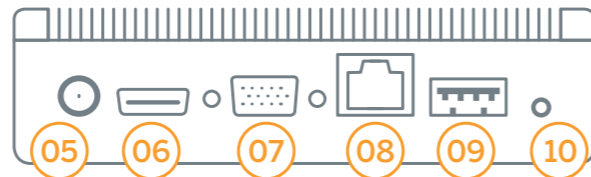


DAVIEW MINI

DATASHEET

4
channels

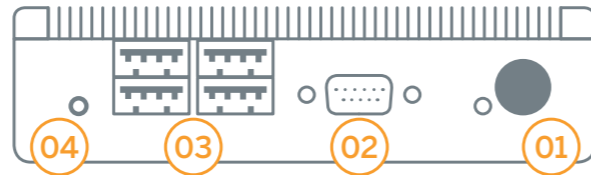

Optional

- 01 · On/Off switch 02 · 1 COM port 03 · 4 USB 2.0 connections 04 · 1 stereo analog audio jack
- 05 · 1 slot for power cable 06 · 1 HDMI port 07 · 1 VGA port 08 · RJ45 network connector 10/100/1000
- 09 · 1 USB 2.0 connection 10 · 1 stereo analog audio jack 11 · 4 digital inputs 12 · 4 relays NA/NC

TECHNICAL SPECIFICATIONS

Processor	Intel
Memory (RAM)	4 GB
Hard drive	NAND flash memory based SSD (Solid State Drive)
Power supply	DC Power 12-19V, 65W (external power supply)
Power consumption	Approx. 30 W at full load
Power cord and plug	12v power supply and power cord
Environmental class	II (Indoor - General)
Housing	Ultra compact housing
Device dimensions in mm	135 x 35 x 128 mm / 5,3 x 1,4 x 5 inch (W x D x H)
Weight	630 gr
Communication protocols	TCP/IP, SMTP
Input and output ports	Input: 900, 5500, 21000 (customizable) Output: 9034, 465 (customizable)
Data protection	Digital signature

OPTIONAL

Input activation signal	USB external device, 4 N/C isolated inputs (dry contact)
Relay outputs	USB external device, 4 N/C relay outputs (dry contact), max. 6A at AC
Daview AMS	Alarm Management System for CMS with ClickThru™ technology

Intruder	Loitering
Vehicles	Appearance / disappearance
Entry / exit	Combination of rules
Tampering	



DAVANTIS TECHNOLOGIES SL | BARCELONA · SPAIN · +34 935 868 990 | MADRID · SPAIN · +34 918 294 186
SANTIAGO DE CHILE · CHILE · +56 995 355 255 | BOGOTA · COLOMBIA · +57 3015389151 | SINGAPORE · +65 9877 3532

DAVANTIS TECHNOLOGIES INC
WASHINGTON DC · USA · +1 703 973 7527

info@davantis.com
www.davantis.com



67 m
(73 yd)
of detection

Range table for day/night cameras

	f (mm/inch)	Height (m/ft)	Sensor	HFOV (°)	Blind distance (m/yd)	Distance (m/yd)
Standard view	3/0,12	4/13	(1/3)"	77°	2/2	32/35
	8/0,31	4/13	(1/3)"	33°	8/9	67/73